


AUSSENGEWINDE, F30 GEHÄMMERT\_EXTERNAL THREAD F30, HAMMERED

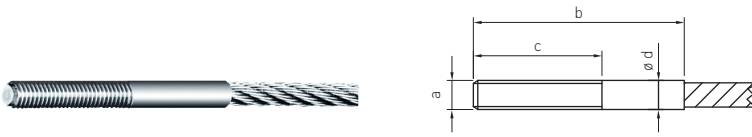

Artikelnummer Rechtsgewinde Part number RH thread	Artikelnummer Linksgewinde Part number LH thread	a	b	c	$\varnothing d^{+0,2}_0$	$\varnothing$ Seil $\varnothing$ rope	kN
948-0300-20 <a href="#">dwg</a>	949-0300-20 <a href="#">dwg</a>	M4	37	20	4	3	4
948-0300-40	949-0300-40 <a href="#">dwg</a>	M4	57	40	4	3	4
948-0400-30 <a href="#">dwg</a>	949-0400-30 <a href="#">dwg</a>	M5	50	30	5	4	7,1
948-0400-50 <a href="#">dwg</a>	949-0400-50 <a href="#">dwg</a>	M5	70	50	5	4	7,1
948-0500-30 <a href="#">dwg</a>	949-0500-30 <a href="#">dwg</a>	M6	55	30	6	5	11,2
948-0500-50 <a href="#">dwg</a>	949-0500-50 <a href="#">dwg</a>	M6	75	50	6	5	11,2
948-0600-30 <a href="#">dwg</a>	949-0600-30 <a href="#">dwg</a>	M8	58	30	8	6	16
948-0600-60 <a href="#">dwg</a>	949-0600-60 <a href="#">dwg</a>	M8	88	60	8	6	16
948-0800-30 <a href="#">dwg</a>	949-0800-30 <a href="#">dwg</a>	M10	68	30	10	8	25
948-0800-60 <a href="#">dwg</a>	949-0800-60 <a href="#">dwg</a>	M10	98	60	10	8	25
948-1000-30 <a href="#">dwg</a>	949-1000-30 <a href="#">dwg</a>	M12	76	30	12	10	41,6
948-1000-60 <a href="#">dwg</a>	949-1000-60 <a href="#">dwg</a>	M12	106	60	12	10	41,6

Werkstoff 1.4404 | Nicht geeignet für Spiralseile 1x19 | kN = Bruchkraft\_Material AISI 316L | Not suitable for strands 1x19 | kN = breaking load

ALLE ANGABEN IN MILLIMETERN\_ALL DIMENSIONS IN MILLIMETRES