


AUSSENGEWINDE, F50 GEHÄMMERT_EXTERNAL THREAD F50, HAMMERED

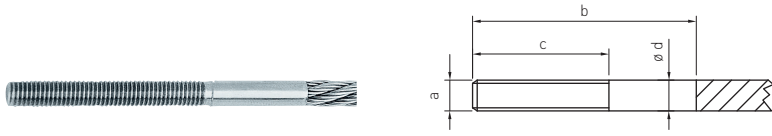

Artikelnummer Rechtsgewinde Part number RH thread	Artikelnummer Linksgewinde Part number LH thread	a	b	c	$\varnothing d \begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	\varnothing Seil \varnothing rope	kN
950-0400-30 dwg	951-0400-30 dwg	M4	55	30	4,4	4	5,3
950-0400-60 dwg	951-0400-60 dwg	M4	85	60	4,4	4	5,3
950-0500-30 dwg	951-0500-30 dwg	M5	60	30	5,5	5	8,4
950-0500-60 dwg	951-0500-60 dwg	M5	90	60	5,5	5	8,4
950-0600-30 dwg	951-0600-30 dwg	M6	66	30	6,6	6	12,1
950-0600-60 dwg	951-0600-60 dwg	M6	96	60	6,6	6	12,1
950-0800-30 dwg	951-0800-30 dwg	M8	90	30	8,8	8	21,5
950-0800-60 dwg	951-0800-60 dwg	M8	120	60	8,8	8	21,5

Werkstoff 1.4404 | Nicht geeignet für Spiralseile 1x19 | kN = Bruchkraft_Material AISI 316L | Not suitable for strands 1x19| kN = breaking load

ALLE ANGABEN IN MILLIMETERN_ALL DIMENSIONS IN MILLIMETRES