


# AUSSENGEWINDE

## EXTERNAL THREADS

### AUSSENGEWINDE, F50 GEHÄMMERT

#### EXTERNAL THREAD F50, HAMMERED

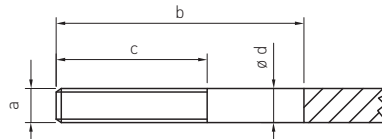

Artikelnummer Rechtsgewinde Part number RH thread	Artikelnummer Linksgewinde Part number LH thread	a	b	c	$\varnothing d \begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	$\varnothing$ Seil $\varnothing$ rope	kN
950-0400-30	951-0400-30	M4	55	30	4,4	4	5,3
950-0400-60	951-0400-60	M4	85	60	4,4	4	5,3
950-0500-30	951-0500-30	M5	60	30	5,5	5	8,4
950-0500-60	951-0500-60	M5	90	60	5,5	5	8,4
950-0600-30	951-0600-30	M6	66	30	6,6	6	12,1
950-0600-60	951-0600-60	M6	96	60	6,6	6	12,1
950-0800-30	951-0800-30	M8	90	30	8,8	8	21,5
950-0800-60	951-0800-60	M8	120	60	8,8	8	21,5

**Werkstoff 1.4404 | Nicht geeignet für Spiralseile 1x19 | kN = Bruchkraft**  
 rial AISI 316L | Not suitable for strands 1x19| kN = breaking load

**Alle Angaben in Millimetern**  
 All dimensions in millimeters